






**WHITE
KNIGHT®**

PSA SERIES PUMPS

Ultra-Pure Pumps for Advanced Chemical Processes

Metal-free pumps with PTFE/PFA flow paths for ultra-pure chemical process applications. PSA Series pumps are capable of up to 100°C (212°F) fluid temperatures and 7 bar (100 psi) air pressures. PSASD models can run dry for more than one hour without pump damage.

ADVANCED PUMP TECHNOLOGIES

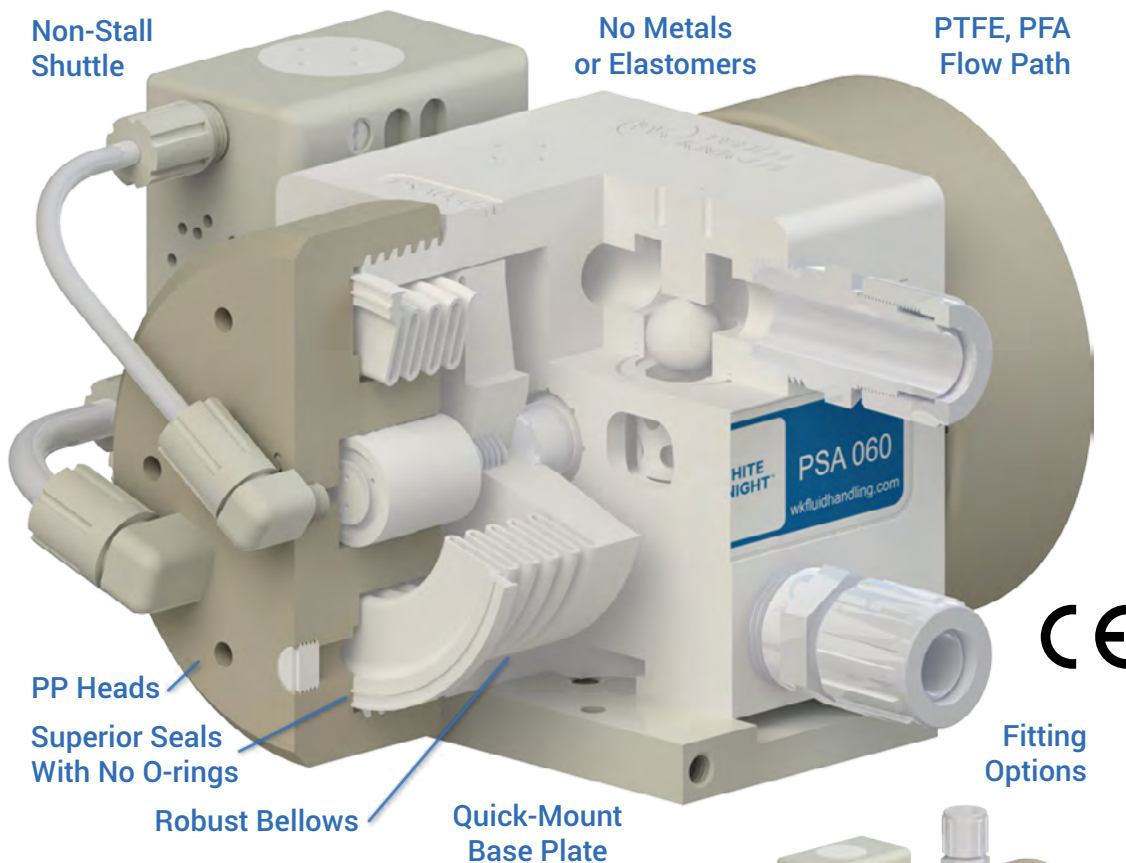

Features & Benefits

- Process-safe PTFE, PFA flow paths
- Contains no metals or elastomers
- Durable machined design with minimal parts
- Reliable, safe operation with no O-rings and leak-free seals
- On-board, non-stall shuttle saves space and eliminates resets
- Robust bellows allow for 7 bar (100 psi) supply pressure
- Pneumatic Logic™ minimizes liquid pulsation and pump vibration
- No lubricants in shift mechanism to eliminate potential contamination
- No electric motors, which generate heat
- Class 100 cleanroom assembly, testing, and packaging
- No preventative maintenance during two-year warranty



Industries

Semiconductor
LEDs & Electronics
Flat-Panel Displays
Photovoltaic / Solar
Aerospace

Applications

Chemical Delivery
Chemical Circulation
Chemical Processing
Chemical Reclaim
Bulk Transport
CMP Slurry

<https://wkfluidhandling.com/psa-series>



Copyright © 2015 White Knight Fluid Handling | A Graco company
P: 435.783.6040 | E: info@wkfluidhandling.com | W: <https://wkfluidhandling.com>

Version: 2.0.0 | Published 01/30/2015
Specifications subject to change without notice




**WHITE
KNIGHT®**

PSA SERIES PUMPS

Operation

Pneumatic Logic™ minimizes pulsation, vibration, and wear. It automatically resets shuttle valves after shutdowns, and ensures correct spool placement at the end of each stroke. It has no detents to fail or seals to fatigue.

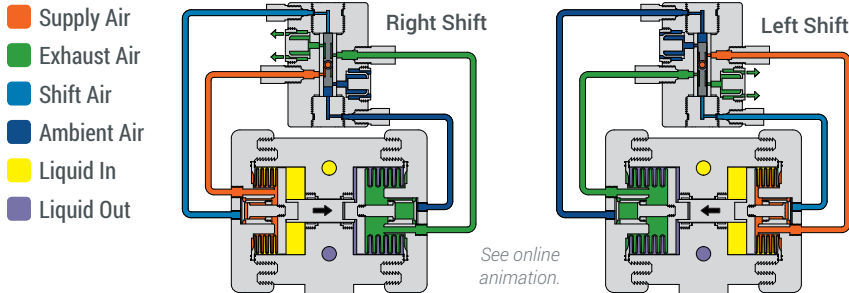

Configuration

PSA 060 - F 12 - LF0 SF0 - T P 08 -
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ (optional)*

① Pump Type

PSA = Standard
 PSASD = Dry-run capable

① Pump Size

015 = 15 lpm (4 gpm) max discharge
 030 = 30 lpm (8 gpm) max discharge
 060 = 60 lpm (16 gpm) max discharge
 140 = 140 lpm (36 gpm) max discharge

② Fitting Style

F = Flaretek® compatible
 T = Tube Out
 W = Weldable
 P = Pillar S-300®
 N = Female NPT (FNPT)

③ Fitting Size

04 = 1/4 in
 06 = 3/8 in
 08 = 1/2 in
 12 = 3/4 in
 16 = 1 in
 20 = 1-1/4 in

④ Leak Detection

LF0 = 15 ft fiber optic cable, no amplifier
 LF1 = 15 ft fiber optic cable, D10 amplifier
 LF2 = 25 ft fiber optic cable, no amplifier
 LF3 = 25 ft fiber optic cable, D10 amplifier
 LC0 = 15 ft conductivity cable

⑤ Stroke Detection

SF0 = Single probe, 15 ft fiber optic cable, no amplifier
 SF1 = Single probe, 15 ft fiber optic cable, D10 amplifier
 SF2 = Single probe, 25 ft fiber optic cable, no amplifier
 SF3 = Single probe, 25 ft fiber optic cable, D10 amplifier
 SP1 = Single Pressure Switch (NPN)
 SP2 = Dual NPN Pressure Switch (each with two DP2)*
 SP3 = Dual Pressure Switch (no switches supplied)*
 SP4 = Single PNP Pressure Switch
 SP5 = Dual PNP Pressure Switch (each with two DP2)

⑥ Liquid Outlet Position

F = Front straight liquid outlet
 T = Top straight liquid outlet

⑦ Liquid Outlet Style and Size

Choices are same as ② and ③ above

⑨ Revision level

Contact White Knight for copy exact information.


Define optional items only if desired. Define outlet fitting options (6-8) if they differ from inlet fitting options (2)(3).

All fittings are not available in all sizes, and all fittings are not compatible with all pump sizes. Call for details.

Operating pumps in timer mode requires end-of-stroke detection to prevent over stroking. Operating a pump in timer mode without stroke detection voids the warranty.

*Comes without White Knight shuttle valve.

Temperature Limitations

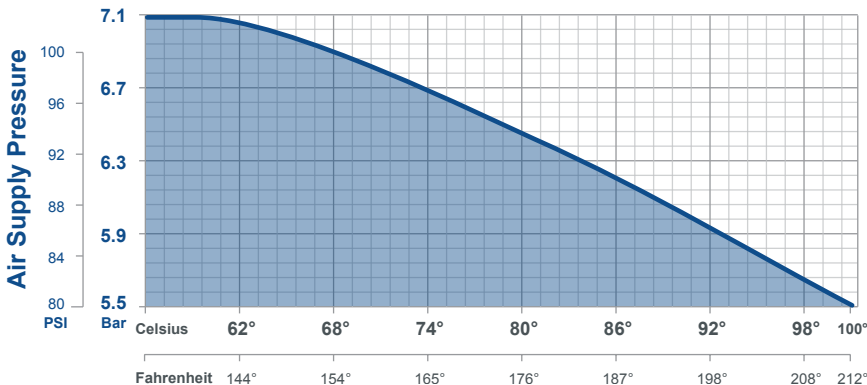

Specifications

Model	PSA015	PSA030	PSA060	PSA140
Max Flow Rate*	13.6 lpm (3.60 gpm)	24.7 lpm (6.53 gpm)	62.3 lpm (16.46 gpm)	123 lpm (32.5 gpm)
Displacement Per Cycle*	0.070 liters (0.018 gal)	0.074 liters (0.019 gal)	0.178 liters (0.047 gal)	0.500 liters (0.132 gal)
Cycles per min	216 max	333 max	348 max	273 max
Air Connection	1/4 in FNPT	1/4 in FNPT	1/4 in FNPT	3/8 in FNPT
Weight	3.3 kg (7.3 lb)	3.3 kg (7.3 lb)	4.7 kg (10.4 lb)	16.6 kg (36.6 lb)
Suction Lift*	3 m (10 ft)	3 m (10 ft)	3 m (10 ft)	3 m (10 ft)
Sound	Pressure**	74.00 dB(a) 79.90 dB(a)	73.11 dB(a) 82.50 dB(a)	81.98 dB(a) 91.60 dB(a)
	Power**	63.01 dB(a) 69.90 dB(a)	64.29 dB(a) 74.11 dB(a)	76.37 dB(a) 83.16 dB(a)

Stroke Detection	Fiber optic with or without D10 sensor, or solid state pressure switch (NPN or PNP)	Max Air/Fluid Temperature	100°C (212°F)
Leak Detection	Fiber optic with or without sensor, or conductivity	Max Supply Air Pressure	7 bar (100 psi)
Electronic Control	CPC, CPT, or custom. Call for details.	Min Startup Air Pressure	1.4 bar (20 psi)
		Fluid Path Materials	PTFE, PFA
		Non-Fluid Path Materials	PTFE, PFA, PP, Ceramic

* May vary by configuration. Suction lift diminishes over time.

Recommended installation level less than 3 ft above source.

** dB level at 100 psi 50 CPM (top) and 100 psi max. CPM (bottom).

Sound levels measured in accordance with ISO9614-2:1997.

***Dry-run capable PSASD pumps require flooded suction, and may include a reduced warranty period. Contact White Knight for details.






**WHITE
KNIGHT®**


PSA SERIES PUMPS

Performance

PSA030

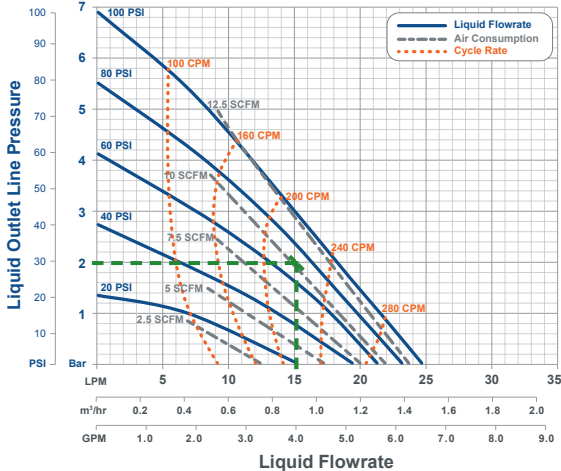

PSA030SD

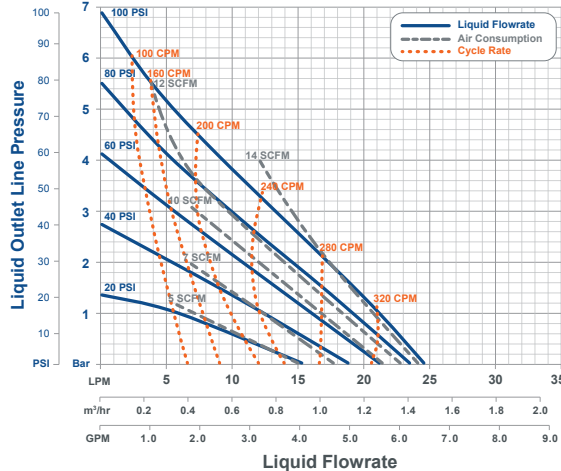


Reading Charts


Draw a horizontal line from your liquid outlet line pressure and a vertical line through your desired flow rate. At their intersection, estimate required liquid flow rate (or air supply pressure), cycle rate and air consumption.

See green dashed lines in PSA030 and PSA060 charts for examples.

PSA060

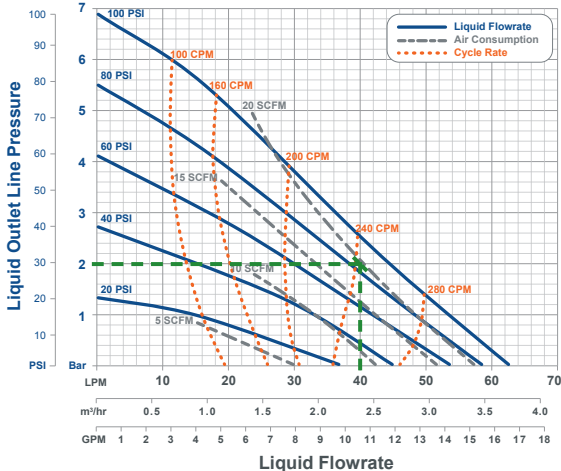

PSA060SD

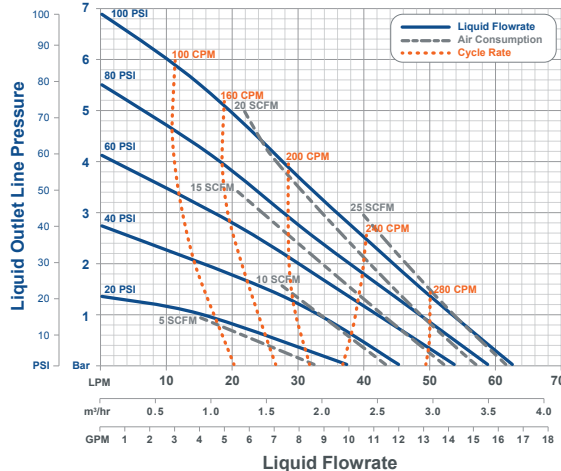


Example 1

At 2 bar (30 psi) liquid outlet line pressure and 70 psi supply pressure, PSA030 pumps provide 15 lpm (4 gpm) liquid flow rate. They would cycle at 220 CPM, and exhaust 10 SCFM of air.


Example 2

At 2 bar (30 psi) liquid outlet line pressure and 82 psi supply pressure, PSA060 pumps provide 40 lpm (10.6 gpm) flow rates. They would cycle at 240 CPM and exhaust 20 SCFM of air.

PSA140

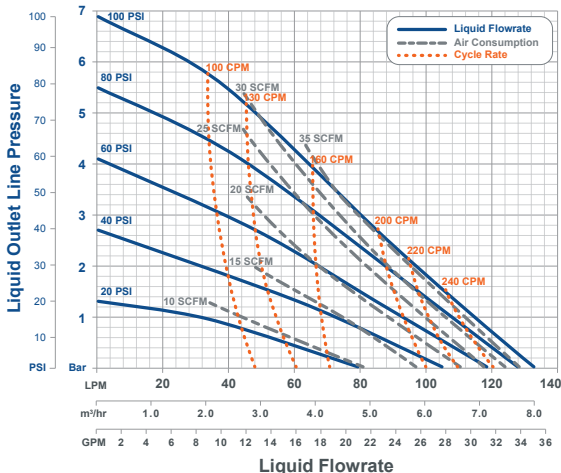

PSA015

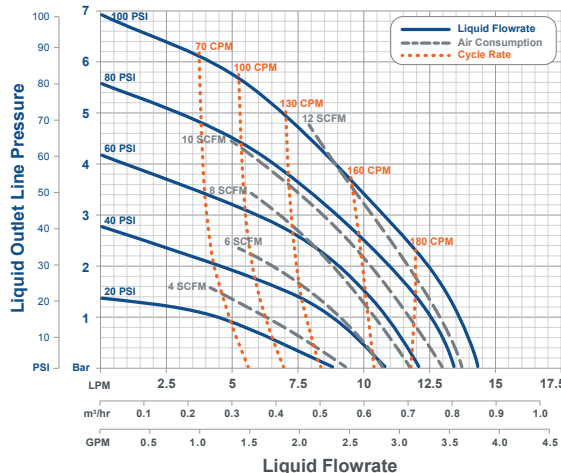



**WHITE
KNIGHT®**

PSA SERIES PUMPS



Dimensions

Dimensions in millimeters (inches)


	PSA015	PSA030	PSA060	PSA140
A	234 (9.2)	234 (9.2)	270 (10.6)	361 (14.2)
B	214 (8.4)	214 (8.4)	259 (10.2)	345 (13.6)
C	121 (4.8)	121 (4.8)	154 (6.1)	233 (9.2)
D	Ø105 (4.1)	Ø105 (4.1)	Ø140 (5.5)	Ø222 (8.7)
E	57 (2.2)	57 (2.2)	79 (3.1)	138 (5.4)
F	66 (2.6)	66 (2.6)	75 (3.0)	75 (3.0)
G	100 (3.9)	100 (3.9)	127 (5.0)	206 (8.1)
H	8 (0.3)	8 (0.3)	8 (0.3)	8 (0.3)
I	32 (1.3)	32 (1.3)	37 (1.5)	53 (2.1)
J	31 (1.2)	31 (1.2)	46 (1.8)	47 (1.8)
K	51 (2.0)	51 (2.0)	51 (2.0)	51 (2.0)
L	11 (0.4)	11 (0.4)	10 (0.4)	11 (0.4)
M	62 (2.5)	62 (2.5)	91 (3.6)	94 (3.7)
N	25 (1.0)	25 (1.0)	19 (0.7)	57 (2.2)
O	111 (4.4)	111 (4.4)	135 (5.3)	215 (8.4)

Rigid baseplate available. Call for details.

<https://wkfluidhandling.com/psa-series>

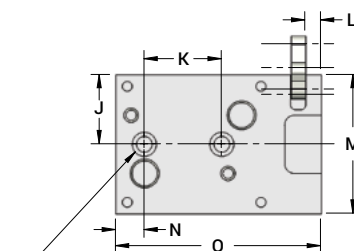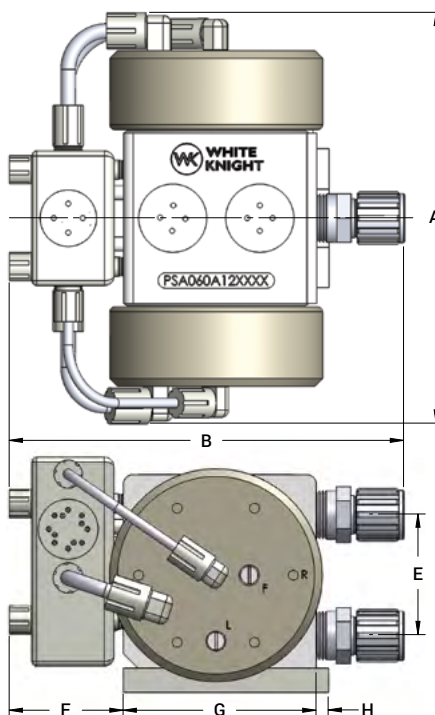

MOUNT WITH 2 EA.
3/8" (10 mm) SOCKET
HEAD CAP SCREWS

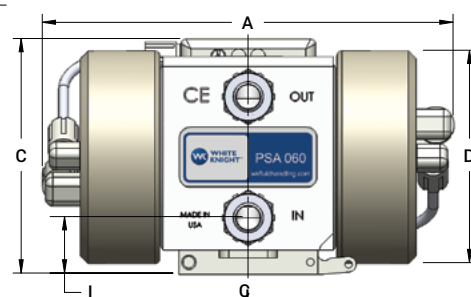

White Knight Accessories

Ultra-Pure Closed-Loop Systems

Automatically control flow or pressure with metal-free systems capable of 210°C, dead-head and suction lift!



Automatically maintain flow or pressure in ultra-pure chemical process and delivery systems. Simplify process automation to save time and resources, improve yields and reduce cost.

<https://wkfluidhandling.com/closed-loop>

- Up to 210°C (410°F)
- No metals or elastomers
- No heat generation
- No O-rings or lubrication
- Suction lift & dead-head

Pulse Dampeners

Reduce pulsation in fluid systems to improve flow control, increase yields, protect fittings and pipes, and minimize downtime for repairs.

<https://wkfluidhandling.com/dampeners>



Pressure Regulators

Control upstream or downstream pressure! A single back-pressure regulator equalizes upstream fluid pressure across multiple discharge outlets. Forward-pressure regulators control downstream pressure.

<https://wkfluidhandling.com/regulators>



Cycle-Rate Translator

The cycle rate translator enables pump replacements in existing tools. It operates a White Knight pump at its optimal cycle rate and scales the operational cycle rate to that expected by the tool.

<https://wkfluidhandling.com/cpt>

